

AS 4-1100 TC



Specification

Model	Audex AS 4-1100 TC
Outlet	100mm
Motor Power	11kW 15HP
Rated Current (400V)	22A
Max Capacity	1400L/min (84m ³ /h)
Max Head	48.5m
Impeller Passage	11.5mm
N.W	136kg
G.W	148kg
Dimensions	885 x 415 x 435mm

Pump photo is for illustrative purposes only.


Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- A semi-open impeller made of high chrome alloy and a wear plate made of ductile iron.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Applications

- Civil engineering
- Mines, quarries, coal ore and slurries
- General pumping purposes

Performance

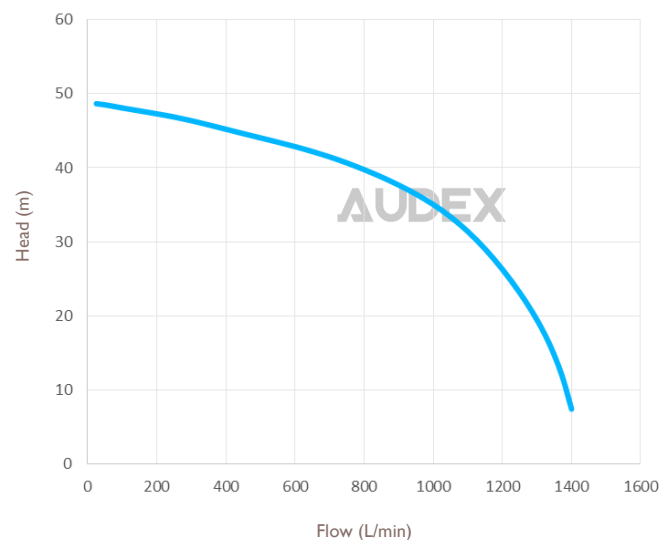

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500
E: info@intraxglobal.com
W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 23.04.19